


The all-new RTV500—advanced technology from Kubota delivers exceptional performand reliability in a compact size.

Whether you're tending a park, hunting in the woods, or simply roaming your property, let Kubota's new RTV500 take you wherever you need to go. This quiet utility vehicle features Kubota's new liquid-cooled EFI Petrol engine, a new variable hydrostatic transmission, and more—all packed into a compact body. Used for a variety of applications, it's powerful and rugged enough to handle hills and uneven terrain, yet it can fit onto a full-size pickup truck, so you can take it with you. With all of this and more, you can rest assured that the high-performance RTV500 is always at the ready, no matter where you want to go.

Kubota Liquid-cooled EFI Petrol Engine

The RTV500's new 15.8-horsepower, 2-cylinder Kubota petrol engine is liquid-cooled to ensure reliability and minimize noise and vibration, reducing operator fatigue and increasing efficiency. The engine features an Electronic Fuel Injection (EFI) system that provides on-demand power, optimizes acceleration and enhances quiet operability. Plus, the EFI eliminates the need to adjust the carburetor—enabling better engine start-up in cold weather or after long-term storage, and improving engine serviceability.

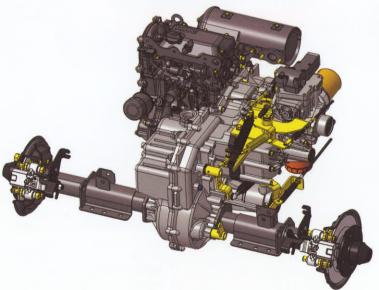

VHT Plus (Variable Hydro Transmission)

Kubota's exclusive and innovative hydrostatic transmission eliminates the need to adjust belt drives and provides the RTV500 with an exceptional level of performance, handling, and reliability under tough conditions. Ride the hills with quick acceleration and smooth, engine-assisted deceleration. In addition, the VHT offers outstanding traction and impressive

power, providing the muscle to take you almost anywhere.









Specifications

Specifications			
Model			RTV500
Engine	Make		KUBOTA GZ460F-E3-UV
	Туре		2-Cylinder, 4-cycle, Petrol, OHC, water-cooled, EFI
	Displacement	cc	456
	Horsepower HP (k	(W)/rpm	15.8 (11.8)@3600
Exhaust system			Muffler with screen-type spark arrestor
Fuel tank capacity ℓ		l	20
Transmission			Variable hydro transmission (VHT)
Max. Traveling speed km/h		km/h	40
Wheels, drive system			Rear 2WD or 4WD Selection
Differential lock			Standard; hand operated with mechanical holder
Gear selection			Hi-Lo range forward, neutral, reverse
Brakes	Front / Rear		Dry-disc brakes
	Parking brake		Rear wheel, hand lever
Steering			Rack & Pinion
Suspension Front / Rear			Independent, Mac-Pherson strut-type / Semi-independent, Multi-link
Dimensions	Length	mm	2690
	Width	mm	1390
	Height, overall	mm	1829
	Front tread centers	mm	1016
	Rear tread centers	mm	1041
	Wheelbase	mm	1800
	Ground clearance front/rear axle	mm	205 / 175
	Turning diameter	m	2.13
Max. rolling weight (Towing capacity) kg		kg	500
Payload capacity kg		kg	430
Weight kg		kg	620
Cargo bed	Width Length Depth	mm	1032 × 856 × 290
	Volume	m³	0.25
	Bed height (unloaded)	mm	810
	Cargo bed load	kg	200
Sound level	, operator ear	A	83
Tyres	Front		24 × 9-12 HDWS, 6PLY
	Rear		24 × 11-12 HDWS, 6PLY
Body color			Orange
Speedometer			Opt.
Front guard			Opt.
Headrest			Opt.

The company reserves the right to change the above specifications without notice. This brochure is for descriptive purposes only. Please contact your local Kubota dealer for warranty and safety information. The values in "Ground clearance" and "Weight" are those of the machine equipped with the tires in the table above. Some RTVs in this brochure are shown with optional accessories. For off-highway use only.

KUBOTA Tractor Australia Pty Ltd

25-29 Permas Way, TRUGANINA Vic, 3029 Freecall: 1800 334 653 Email: sales@kubota.com.au

Web Site: http://www.kubota.com.au

CB Norwood Distributors Ltd

PO Box 1265, 888 Tremaine Avenue, Palmerston North 0800 KUBOTA Tel: 06 356 4920 Fax: 06 356 4939

Web Site: http://www.kubota.co.nz

