FELDMASTER



VINEYARD AND ORCHARD MOWERS









- GMR Rear Discharge
- GMS Side Discharge
- XHD Extra Heavy Duty
 - MX Single Rotor





GMS Side Discharge / GMR Rear Discharge

GMS180 Side Discharge c/w front and rear rollers.



Fieldmaster exclusive MAXI TORQUE flex & shock compensator couplings (not fitted on the 300 models) are specifically designed for rugged agricultural applications, to protect transmission from shock or slight axial or radial mis-alignments.



Standard blades are heavy duty mulching type axe flails.



Offset linkage option allows 300mm offset from the centre, to the RHS of the tractor.



Optional 'Gold-Tips' fine cutting tips are available for a clean "lawn finish" cut.



		G	MS-SID	E DISCH	ARGE			GMR	- REAR D	DISCHAR	IGE :	
Model	160	180	200	230	270	300	160	180	200	230	270	300
Overall width (cm) *	161	182	201	231	276	306	174	194	214	244	248	314
Overall depth icmi **	152	158	168	172	189	169	152	158	168	172	189	169
Cut width (cm)	159	175	196	222	266	296	159	175	196	222	266	296
Tip speed (mtrs/min)	4063	4426	4904	5478	4936	4705	4063	4426	4904	5478	4936	4705
Tractor HP (min/max)	40/80	40/80	40/80	40/80	50/90	60/150	40/80	40/80	40/80	40/80	50/90	60/150
No of Rators	2	2	2	2	2	3	2	2	2	2	2	3
Deck Construction	2x5mm monocoque			6mm reinforced		2 x 5mm monocoque			6mm reinforced			


^{*-} overall width includes skid on rear discharge model. ** - overall depth is from centre of linkage pins to back of roller.

XHD Extra Heavy Duty Mower

XHD 180 Side Discharge c/w 4x wheels.



XHD 180 Side Discharge c/w rollers.

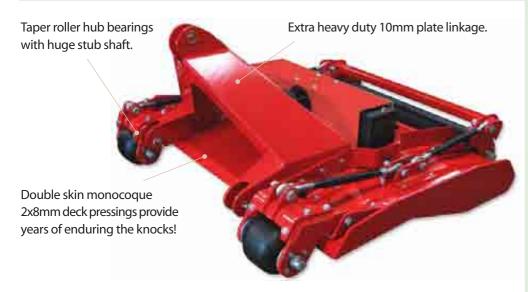

Gearmower model XHD is a market leader! Available in side discharge and rear discharge configuration, the XHD boasts numerous extremely rugged build features that are designed to last for years and years. XHD has been designed and tested and proven for years in the most rigorous, demanding and punishing environments of today's large vineyards. Proven and recommended by the large corporate vineyard owners, as a machine that can be left to the demanding operator who wants speed, action and **NO** downtime!



XHD Heavy duty rollers feature taper roller bearings for long life to endure extreme conditions. All rollers are 220mm diameter.



Heavy duty puncture proof semi-swivel wheels have spring returns to maintain and assist tracking and castor position.

		XHD SIDE			XHD REAR		
Model	160	180	200	160	180	200	
Overall width (cm) *	162	182	203	175	341	217	
Overall depth (cm) **	152	158	168	152	158	168	
Cut width (cm)	159	175	196	159	175	196	
Tip speed (mtrs/min)	5443 @ 1000rpm	5534 @ 900rpm	5489 # 800rpm	5443 @ 1000rpm	5534	5489	
Tractor HP (min/max)	50 - 120 hp						
No of Rotors	2	2	2	2	2	2	
Deck Construction	2 x 8mm monocoque design laminated decks						

^{* -} overall width includes skid on rear discharge model. ** - overall depth is from centre of linkage pins to back of roller.

MODEL:

MX Extra Heavy Duty Single Rotor Mower



MX60 with skids & optional upgraded HD rear roller (with taper roller bearings)



MX60 with front and rear roller (FL bearings) and side panels.



MX60 with four puncture proof pneumatic castoring wheels

Heavy weight single rotor for slim and narrow vineyards. MX standard features are four heavy duty axe head flails on a circular double clevis flail carrier and friction clutch. The MX series are available in a wide variety of "set up" options to customize to your vineyard and conditions.

The Fieldmaster Story

Our equipment is designed and manufactured right here in New Zealand using the highest quality materials. Strength and reliability are built in, ensuring a low total cost of ownership and a nationwide dealership network with parts and support minimizes downtime and maximizes productivity. So if you're looking for equipment that, like you, isn't shy of hard work, choose Fieldmaster every time.



	MX50	MX60	MX70
Tractor HP	40-80	40-80	50-100
Cutting width	1380mm	1585mm	1772mm
Overall Width (no skids)	1410mm	1616mm	1816mm
DeckThickness	8mm	8mm	8mm
Tip Speed (mtrs/m)	4628	5516	4388



YOUR AUTHORISED FIELDMASTER DEALER IS:

